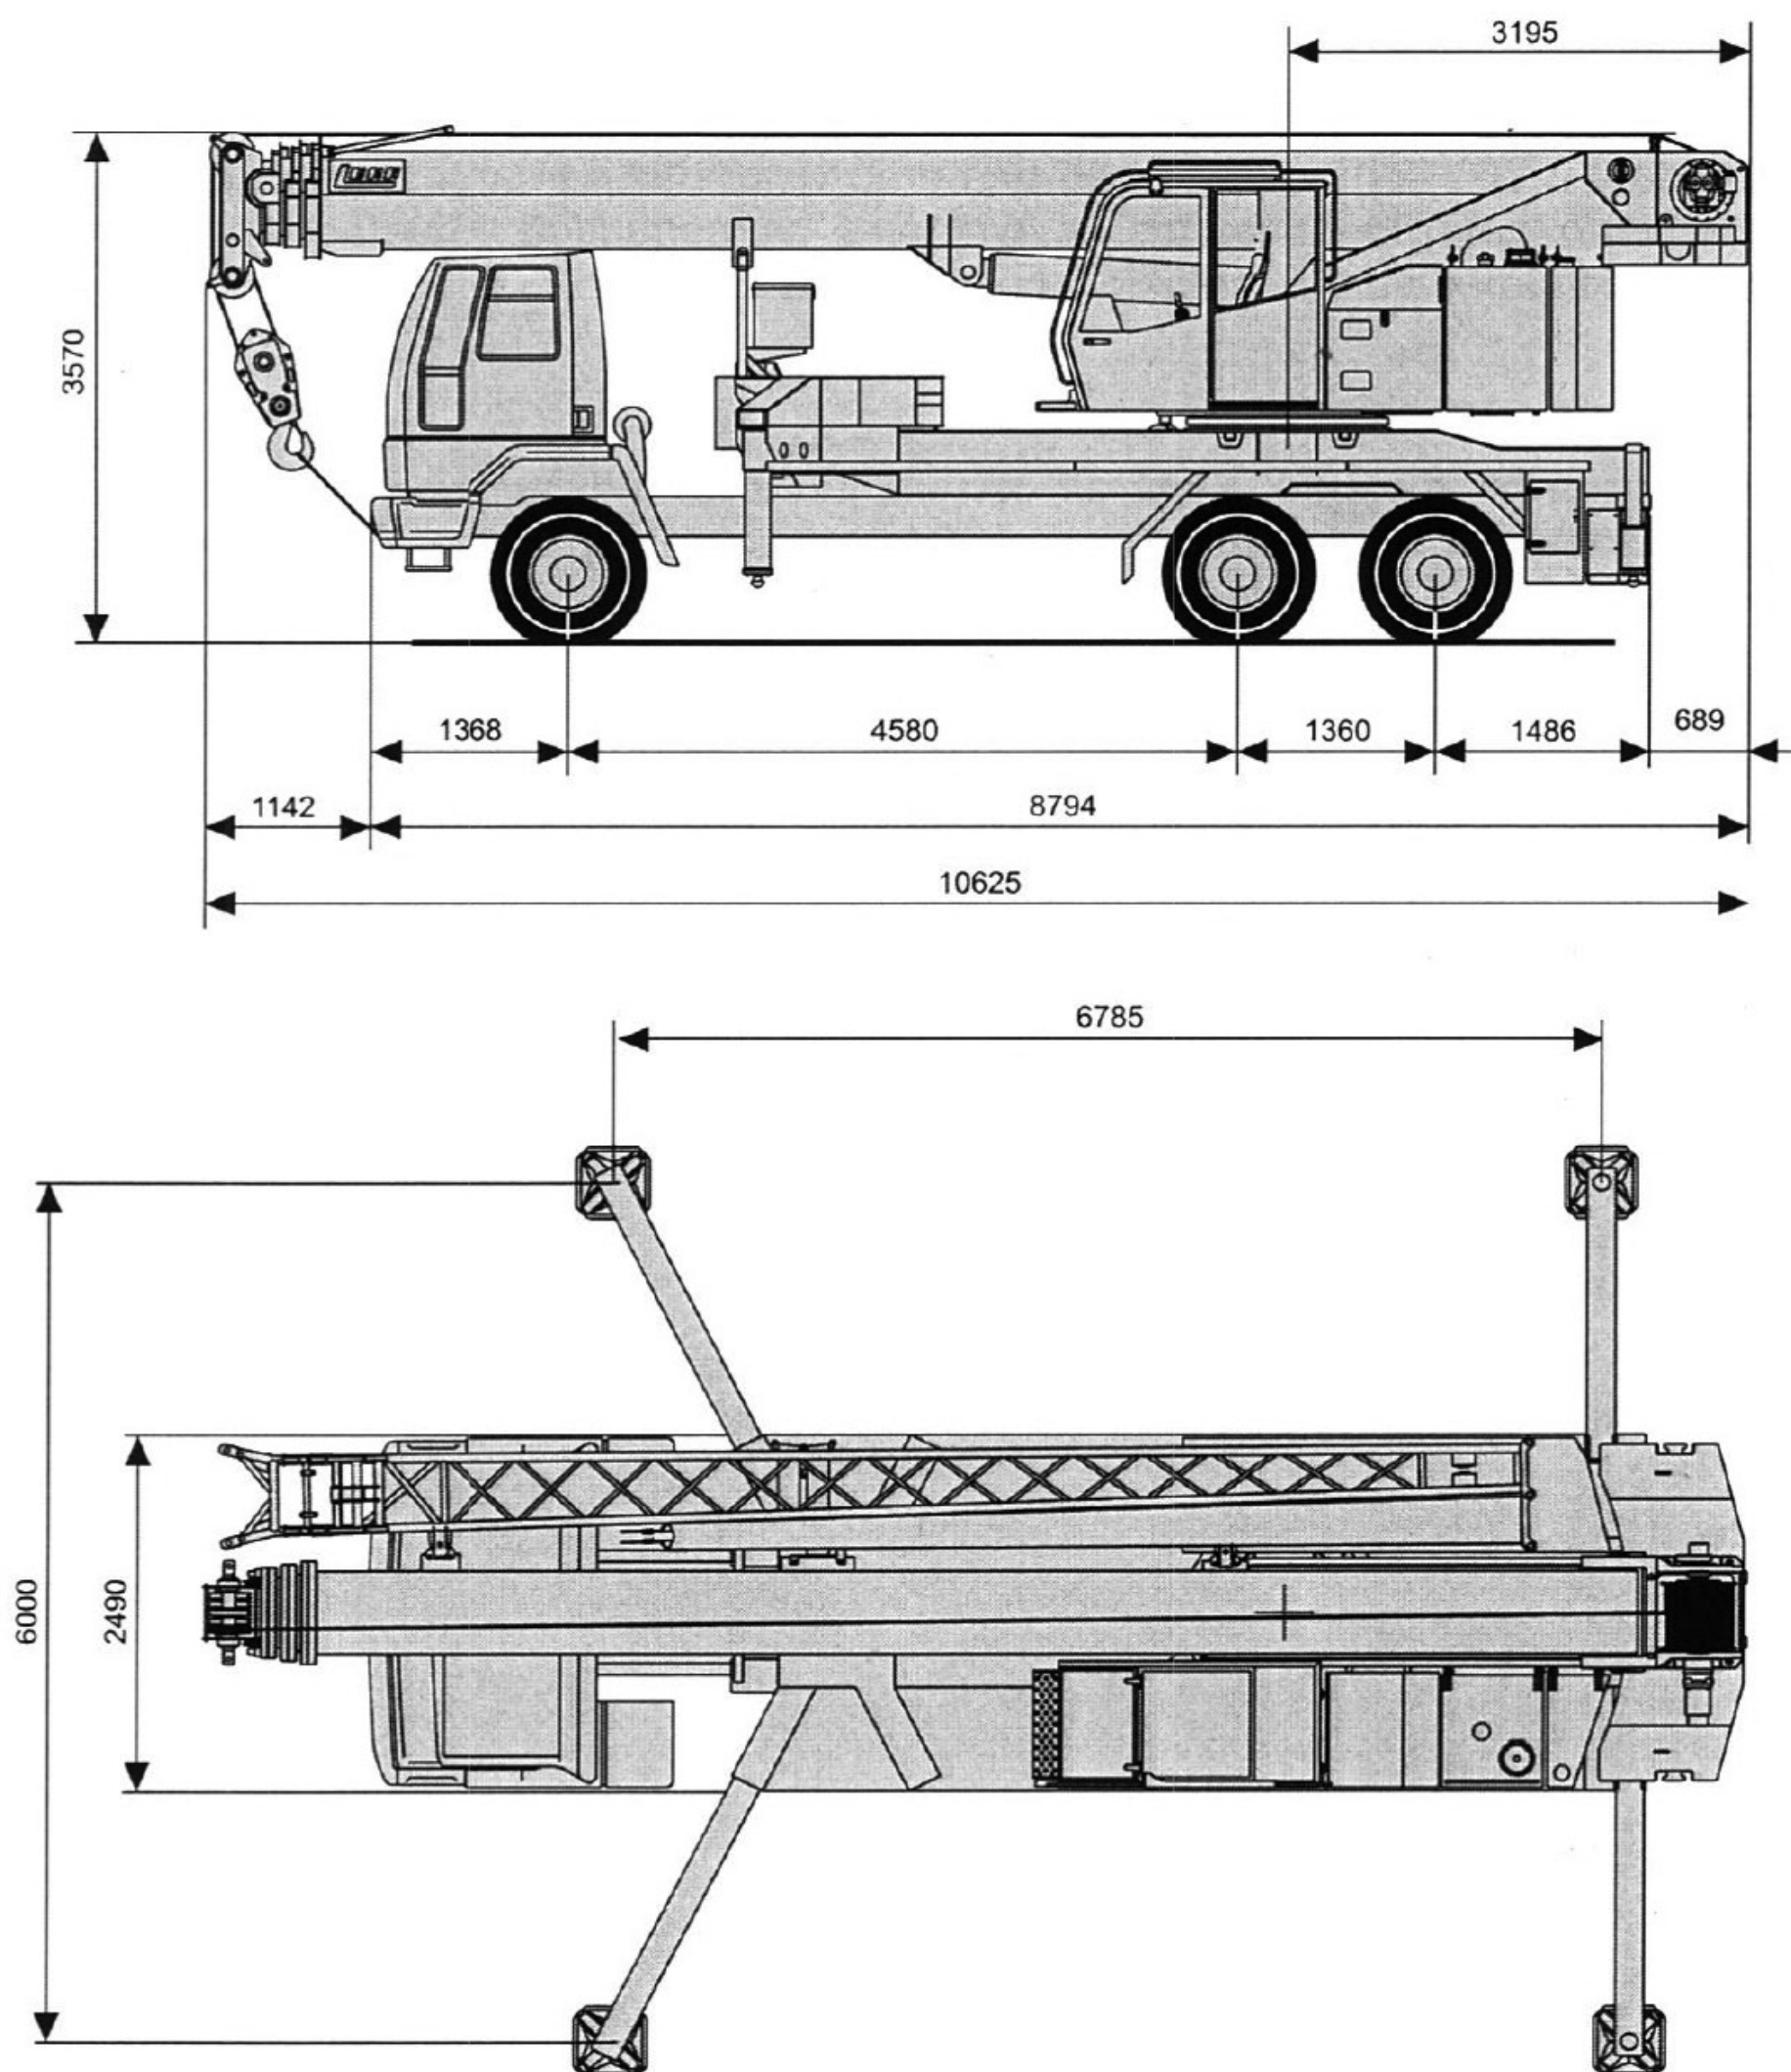


2.1.6 Dimensiones



**TABLA DE CARGAS
LIFTING CAPACITIES
FORCES DE LEVAGE
TRAGLASTEN**

GT-40/32

CONTRAPESO
COUNTERWEIGHT
CONTREPOIDS
BALLAST
2.5 t

(34340)

PLUMA PRINCIPAL+PLUMÍN DE CELOSÍA. GRÚA SOBRE ESTABILIZADORES TOTALMENTE EXTENDIDOS. ZONA DE TRABAJO 360°
MAIN BOOM+LATTICE JIB. CRANE ON FULLY EXTENDED OUTRIGGERS. ROTATION 360°
FLÈCHE PRINCIPALE+FLÉCHETTE TREILLIS. GRUE SUR STABILISATEURS EN EXTENSION TOTALE. ROTATION 360°
TELESKOP AUSLEGER+GITTERSPITZE. ARBEITSZUSTAND: ABGESTÜTZT (VOLLE STÜTZBASIS). ARBEITSBEREICH: 360°

RADIO RADIUS PORTÉE AUSLADUNG m	85%																								RADIO RADIUS PORTÉE AUSLADUNG m
	LONGITUD DE PLUMA+PLUMÍN MAIN BOOM+JIB LENGTH LONGUEUR DE FLÈCHE+FLÉCHETTE TELESKOPAUSLEGER- UND SPITZELÄNGEN																								
	26.4 m + 8.5 m				29.8 m + 8.5 m				32.0 m + 8.5 m				26.4 m + 15 m				29.8 m + 15 m				32.0 m + 15 m				
	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	
6	6.2																								6
7	6.2				5.3				5.0				3.0												7
8	6.2				5.3				5.0				3.0				2.7								8
9	5.8	4.2			5.3				5.0				3.0				2.7				2.6				9
10	5.5	4.2	3.0	2.8	5.3	3.6			5.0	3.6			3.0				2.7				2.6				10
12	5.1	4.1	3.0	2.8	5.0	3.6	2.8	2.7	4.7	3.6	2.8	2.6	2.7	1.9			2.6	1.9			2.6				12
14	4.6	3.7	3.0	2.8	4.4	3.6	2.8	2.7	4.3	3.6	2.8	2.6	2.5	1.9			2.4	1.9			2.4	1.8			14
16	3.6	3.4	3.0	2.8	3.4	3.3	2.8	2.7	3.4	3.3	2.8	2.6	2.4	1.9	1.3	1.2	2.3	1.9			2.3	1.8			16
18	2.9	3.0	3.0	2.6	2.8	2.9	2.8	2.6	2.8	2.9	2.8	2.5	2.2	1.8	1.3	1.2	2.1	1.8	1.3	1.2	2.1	1.7	1.3	1.2	18
20	2.3	2.4	2.5	2.5	2.2	2.3	2.4	2.4	2.2	2.3	2.4	2.4	2.0	1.7	1.3	1.2	1.9	1.7	1.3	1.2	1.9	1.5	1.3	1.2	20
22	1.9	2.0	2.1	2.1	1.8	1.9	2.0	2.0	1.8	1.9	2.0	2.0	1.8	1.5	1.3	1.2	1.7	1.5	1.3	1.2	1.7	1.5	1.3	1.2	22
24	1.4	1.5	1.7	1.7	1.3	1.4	1.5	1.5	1.3	1.4	1.5	1.5	1.5	1.4	1.3	1.2	1.4	1.4	1.3	1.2	1.4	1.4	1.3	1.2	24
26	1.2	1.3	1.4	1.4	1.1	1.2	1.3	1.3	1.1	1.2	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.3	1.2	1.2	1.2	1.3	1.2	1.2	26
28	1.0	1.1	1.2	1.2	0.9	1.0	1.1	1.1	0.9	1.0	1.1	1.1	1.1	1.2	1.2	1.2	1.0	1.1	1.2	1.2	1.0	1.1	1.2	1.2	28
30	0.8	0.9	1.0	1.0	0.7	0.8	0.9	0.9	0.7	0.8	0.9	0.9	0.9	1.0	1.1	1.1	0.8	0.9	1.1	1.1	0.8	0.9	1.1	1.1	30
32	0.6	0.7				0.6	0.7	0.7		0.6	0.7	0.7	0.7	0.8	0.9	0.9	0.6	0.7	0.8	0.8	0.6	0.7	0.8	0.8	32
34													0.6	0.7	0.8	0.8		0.6	0.7	0.7		0.6	0.7	0.7	34
36														0.6					0.6	0.6			0.6	0.6	36
I-II-III-IV	75	75	75	75	90	90	90	90	100	100	100	100	75	75	75	75	90	90	90	90	100	100	100	100	I-II-III-IV

**TABLA DE CARGAS
LIFTING CAPACITIES
FORCES DE LEVAGE
TRAGLASTEN**

GT-40/32

CONTRAPESO
COUNTERWEIGHT
CONTREPOIDS
BALLAST
2.5 t

(31340)

PLUMA PRINCIPAL. GRÚA SOBRE ESTABILIZADORES TOTALMENTE EXTENDIDOS. ZONA DE TRABAJO 360°
MAIN BOOM. CRANE ON FULLY EXTENDED OUTRIGGERS. ROTATION 360°
FLÈCHE PRINCIPALE. GRUE SUR STABILISATEURS EN EXTENSION TOTALE. ROTATION 360°
TELESKOP AUSLEGER. ARBEITSZUSTAND: ABGESTÜTZT (VOLLE STÜTZBASIS). ARBEITSBEREICH: 360°

RADIO RADIUS PORTÉE AUSLADUNG m	85%						RADIO RADIUS PORTÉE AUSLADUNG m
	LONGITUD DE PLUMA BOOM LENGTH LONGUEUR DE FLÈCHE TELESKOP AUSLEGERLÄNGEN						
	9.5 m	15.2 m	20.8 m	26.4 m	29.8 m	32.0 m	
2.75	40.0 *						2.75
3	35.0	20.5					3
4	25.0	20.5	19.0	15.0			4
5	21.0	20.5	18.6	14.9	10.4	9.4	5
6	16.7	17.2	16.5	13.6	10.4	9.4	6
7	12.9	13.2	13.8	12.4	10.4	9.4	7
8		10.6	11.0	11.0	10.1	9.2	8
9		8.6	8.9	9.2	9.0	8.5	9
10		7.3	7.5	7.8	7.9	7.8	10
12		5.4	5.5	5.7	5.8	5.8	12
14			4.2	4.4	4.5	4.5	14
16			3.3	3.4	3.5	3.5	16
18			2.5	2.6	2.9	2.9	18
20				2.1	2.3	2.3	20
22				1.7	1.9	1.9	22
24				1.2	1.4	1.4	24
26					1.1	1.1	26
28						0.9	28
I-II-III	0	25	50	75	90	100	I-II-III



GT-40/32

(30500)

DIAGRAMA DE ALCANCES

RANGE DIAGRAM

DIAGRAMME DES PORTÉES

AUSLADUNGSDIAGRAMM

